


Environmental Improving Equipment

Spot Cooler



SUIDEN

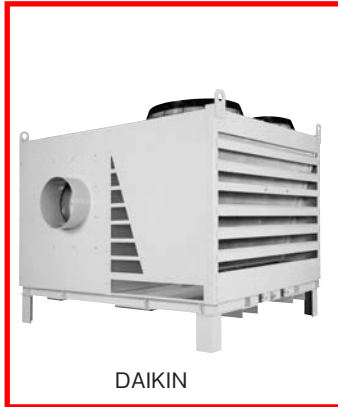

DAIKIN

Specifications

Make	SUIDEN		DAIKIN
	Model	SS-22DD-8A	SS-40DC-8A
Power Supply	1 Phase - AC200V		3 Phase - 380V
Power (W)	800	1,650	62,000
Temperature	25°C~45°C		100m3/min
Dimensions W×D×H (mm)	390×430×808	470×520×1,120	1,950×2,100×1,735
Weight (kg)	37	71	1,040

※ Rental Item : Extend Exhaust Duct 5m



Extend Exhaust Duct



Humidity	Ambient temperature	Cool air temperature	Temperature Difference
80%	38°C	31.6°C	-6.4°C
	35°C	28.4°C	-6.3°C
	32°C	25.1°C	-6.9°C
60%	38°C	28.0°C	-10.0°C
	35°C	25.5°C	-9.5°C
	32°C	22.4°C	-9.6°C
40%	38°C	25.3°C	-12.7°C
	35°C	22.6°C	-12.4°C
	32°C	20.2°C	-11.8°C



Infrared Heater



Specifications

Model	VAL6 KBE1S
Heat Output	28,000kcal / 32.5kw
Fuel	Diesel
Tank Capacity	35ℓ
Power Source	230V
Power Consumption	60W
Dimension (HxWxD)	810mm×655mm×695mm
Dry Weight	38kg

Dehumidifier



ID-12000S



RFB-500F



DM-15V

Specifications

Model	ID-12000S	RFB-500F	DM-15V
Dehumidification (L/H)	50	14	14
Temperature (°C)	1~40	1~40	1~40
Voltage (V)	380	200	200
Power (kW)	14.16	0.54	0.54
Dimensions L×W×H (mm)	2,500×600×1,800	858×377×407	835×430×390
Weight (kg)	610	36	33