
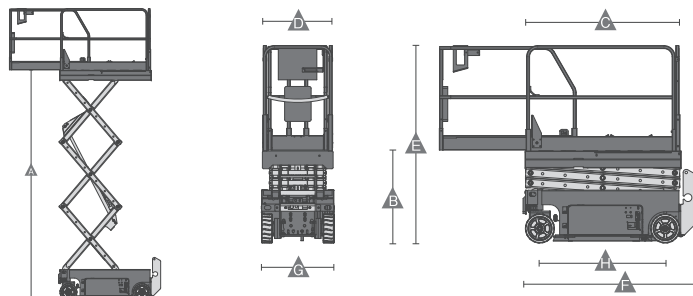


Scissors Lift (Electric)

Scissors Lift (NEW Electric E-Drive)

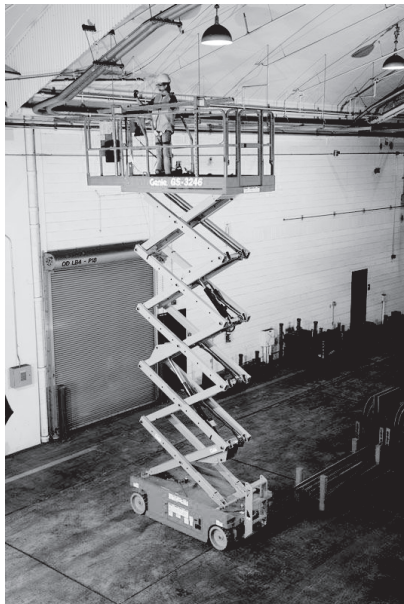

Specifications

| Model | GS1930 E-Drive | GS1932 E-Drive | GS2646 E-Drive | GS3246 E-Drive | GS4046 E-Drive | GS4655 E-Drive |
|---|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Max. Working height (m) | 7,85 | 7,55 | 9,96 | 11,78 | 13,94 | 15,95 |
| Max. Platform height (m) A | 5,85 | 5,55 | 7,96 | 9,78 | 11,94 | 13,95 |
| Platform height stowed (m) B | 1,04 | 0,87 | 1,20 | 1,32 | 1,45 | 1,45 |
| Platform length - outside (m) C | 1,66 | 1,40 | 2,26 | 2,26 | 2,26 | 2,26 |
| Slide-out platform extension deck (m) | 0,91 | 0,06 | 0,91 | 0,91 | 0,91 | 0,91 |
| Platform width - outside (m) D | 0,76 | 0,77 | 1,16 | 1,16 | 1,16 | 1,16 |
| Guardrail height (m) | 1,10 | 1,10 | 1,10 | 1,10 | 1,10 | 1,10 |
| Height - stowed: folded guardrails (m) E | 2,16 | 1,97 | 2,32 | 2,43 | 2,57 | 2,57 |
| Length - stowed (m) F | 1,83 | 1,40 | 2,44 | 2,44 | 2,48 | 2,48 |
| Width (m) G | 0,76 | 0,81 | 1,16 | 1,16 | 1,18 | 1,18 |
| Wheelbase (m) H | 1,32 | 1,12 | 1,85 | 1,85 | 1,85 | 1,85 |
| Safe working load (kg) | 227 | 227 | 454 | 318 | 350 | 349 |
| Power Source | Battery | | | | | |
| Weight (kg) | 1,456 | 1,179 | 1,971 | 2,367 | 3,117 | 3,117 |


※Specifications will be changed by year of manufacture.

- ▶ **90%** Reduce Oil Leakage
- ▶ **70%** Fewer Hoses and Fittings
- ▶ **30%** Increase in Runtime and Efficiency

Scissors Lift (Electric)



GS2646

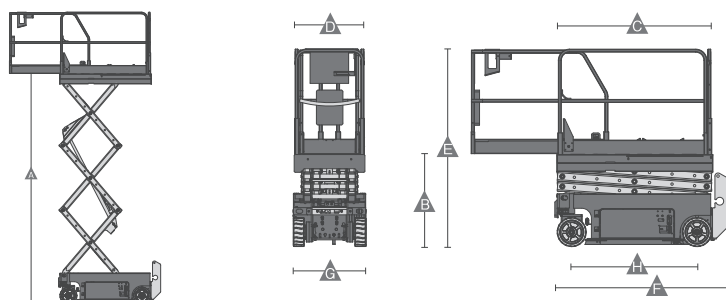

Specifications

| Model | SJ3219 | GS1930 | GS2632 | GS2646 | GS3246 | GS4047 | GS4655 |
|---|---------|--------|--------|--------|--------|--------|--------|
| Max. Working height (m) | 7.79 | 7.79 | 9.80 | 9.80 | 11.75 | 13.94 | 15.95 |
| Max. Platform height (m) A | 5.79 | 5.79 | 7.80 | 7.80 | 9.75 | 11.94 | 13.95 |
| Platform height stowed (m) B | 0.99 | 1.00 | 1.16 | 1.16 | 1.29 | 1.43 | 1.64 |
| Platform length - outside (m) C | 1.78 | 1.63 | 2.26 | 2.26 | 2.26 | 2.26 | 2.84 |
| Slide-out platform extension deck (m) | 0.91 | 0.91 | 0.91 | 0.91 | 0.91 | 0.91 | 1.22 |
| Platform width - outside (m) D | 0.81 | 0.74 | 0.81 | 1.15 | 1.15 | 1.16 | 1.35 |
| Guardrail height (m) | 1.10 | 0.99 | 1.10 | 1.10 | 1.09 | 1.10 | 1.1 |
| Height - stowed: folded guardrails (m) E | 1.99 | 2.11 | 2.26 | 2.26 | 2.39 | 2.55 | 2.77 |
| Length - stowed (m) F | 1.78 | 1.83 | 2.44 | 2.41 | 2.41 | 2.48 | 3.11 |
| Width (m) G | 0.81 | 0.76 | 0.81 | 1.17 | 1.17 | 1.20 | 1.41 |
| Wheelbase (m) H | 1.40 | 1.32 | 1.85 | 1.85 | 1.85 | 1.85 | 2.47 |
| Safe working load (kg) | 249 | 227 | 227 | 454 | 318 | 350 | 349 |
| Power Source | Battery | | | | | | |
| Weight (kg) | 1,312 | 1,226 | 1,959 | 1,983 | 2,353 | 3,222 | 3,711 |

※Specifications will be changed by year of manufacture.