

# Environmental Improving Equipment

## Spot Cooler

### Specifications

Make	SUIDEN			AIRREX	DAIKIN
Model	SS-22DD-8A	SS-40DC-8A	SS-56EG2-8B	HSC-2500	TTIM560B2
Power Supply	1 Phase - AC200V			1 Phase - AC220V	3 Phase - 380V
Power (W)	800	1,650	2,430	6,150	62,000
Cooling Capacity (Btu/h)	7,500	13,500	19,000	21,000	228,614
Temperature (°C)	25~45			20~22	15~43
Dimensions W x D x H (mm)	390 x 430 x 808	470 x 520 x 1,120	490 x 600 x 1,120	490 x 600 x 1,280	1,950 x 2,100 x 1,735
Weight (kg)	37	71	92	86	1,040
Outlet Number	1	2	3	2	1

※W x D x H: Width x Depth x Height

※Rental Item: Extend Exhaust Duct 5m



SUIDEN


AIRREX



DAIKIN




Extend Exhaust Duct

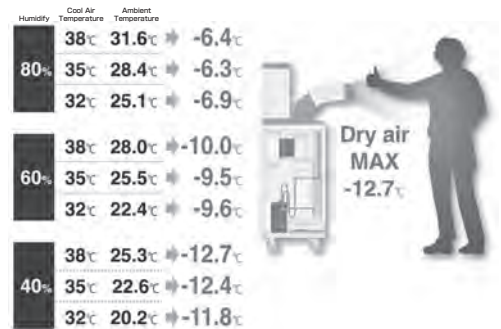

## Infrared Heater



### Lateral View



### Specifications

Model	VAL6 KBE1S
Heat Output	28,000kcal / 32.5kw
Fuel	Diesel
Tank Capacity (ℓ)	35
Power Source	230V
Power Consumption	60W
Dimensions H x W x D (mm)	810 x 655 x 695
Dry Weight (kg)	38

※H x W x D: Height x Width x Depth

## Dehumidifier



RFB-500F



HM-150N



HD-504B



ID-12000S

### Specifications

Make	ORION	FujiE	HARISON	IKENO
Model	RFB-500F	HM-150N	HD-504B	ID-12000S
Dehumidification (ℓ/h)	1.4	6.25	21	50
Temperature (°C)	1~40	5~38	5~40	1~40
Voltage (V)	200	220	380	380
Power (kW)	0.54	1.15~1.68	8.5	14.16
Dimensions L x D x H (mm)	858 x 377 x 407	950 x 470 x 455	1,225 x 520 x 1,761	2,500 x 600 x 1,800
Weight (kg)	36	46	235	610

※L x D x H : Length x Depth x Height