## **UPT400**


## Transport | **Uplifter**



Load capacity	<u>€</u> 400 kg
Suction disc quantity	O 6 pieces
Curved panes	×
Side shift	
Tilt and incline	
Dead weight max.	425,0 kg
Length	1,776 m to 1,978 m
Width	0,685 m
Height	1,979 m
Tilt angle	+8° to -18° electrical
Swivel	90°
	-

<sup>\*</sup> with AA batteries



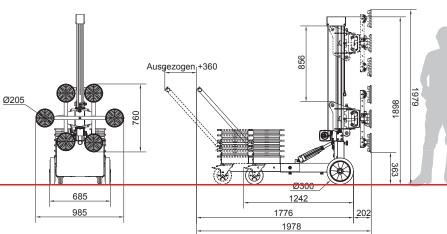



## 🖒 TIP

If the vacuum drops below approx. -0.6 bar, the OTTOvac automatically sucks up to a maximum vacuum of approx. -0.75 bar.





Variable suction pad positioning for different formats or to be able to compensate for openings such as windows.

Removable weights for easier transport







See the detailed application on our **YouTube** channel.

A **tipping unit** is available as an accessory and allows **doors, tiles** and **panels** to be transported as well as assembled in one step.