



NHẸ - BỀN BỈ TẢI TRỌNG ẨM TỰƠNG


Nhôm

Tải trọng
1000kg

Kết nối



AC6-1275

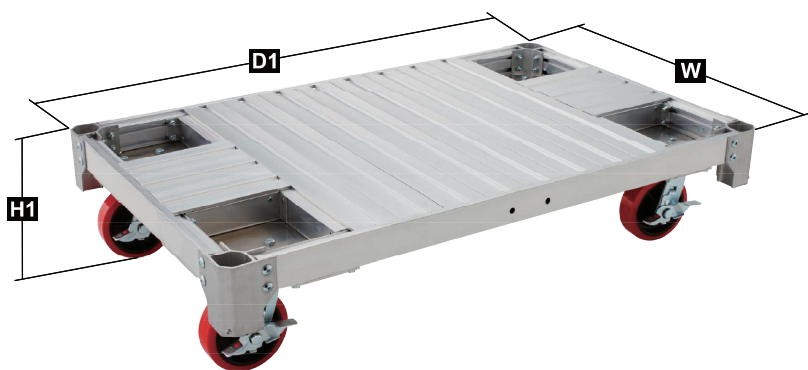

AC6-1200



VẬN HÀNH ÊM ÁI
DỪNG CHẮC CHẴN VỚI KHÓA



ĐỂ KẾT HỢP NHIỀU SẢN PHẨM
CÓ THỂ GHEP NGANG/DỌC TÙY MỤC ĐÍCH



THIẾT KẾ XẾP CHỒNG
ĐỂ SẮP XẾP-TIẾT KIỂM KHÔNG GIAN



THIẾT KẾ LỖ CẮM TẠI 4 GÓC
TĂNG KHẢ NĂNG BẢO VỆ HÀNG HÓA

THÍCH HỢP VẬN CHUYỂN VỚI ĐA DẠNG HÀNG HÓA



SỬ DỤNG THIẾT BỊ
TRONG NHÀ MÁY



KẾT HỢP VỚI XE NÂNG



KẾT HỢP KHUNG LƯỚI
VẬN CHUYỂN CÁC SẢN PHẨM NHỎ



VẬN CHUYỂN SẢN PHẨM
DẠNG TRỤ TRÒN, CÔNG KỀNH

Loại	H (m)	Kích thước sử dụng (cm)			Kích thước gấp gọn (cm)			(kg)
		W1	D1	H1	W2	D2	H2	
AC-1200	0.26	73	118	-	-	-	-	23.0
AC6-1275	0.26	73	118	-	-	-	-	23.0



LIGHT WEIGHT & TOUGH INCREDIBLE STRENGTH


Aluminum

Load
1000kg

Joint



AC6-1275

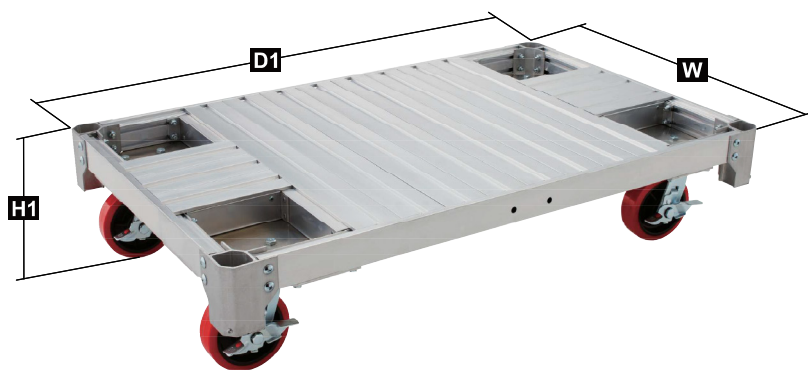

AC6-1200



SMOOTH OPERATION
SECURE STOPS WITH LOCK



FLEXIBLE SET UP
CONNECT SIDE-BY-SIDE OR STACK AS NEEDED



STACKABLE DESIGN
EASY TO STORE-SPACE-SAVING



4-CORNER PIPE SLOTS
BETTER CARGO STABILITY

SUITABLE FOR TRANSPORTING A WIDE VARIETY OF GOODS



INDUSTRIAL USE



FORKLIFTS-COMPATIBLE



COMBINE WITH MESH FRAME



IDEAL FOR ROUNDS
OR OVERSIZES ITEMS

Model	H (m)	Installation Dimension (cm)			Storage Dimension (cm)			(kg)
		W1	D1	H1	W2	D2	H2	
AC-1200	0.26	73	118	-	-	-	-	23.0
AC6-1275	0.26	73	118	-	-	-	-	23.0